


- The 25 cm³ HONDA 4-stroke engine delivers 1.0 HP (DIN).
- At 30 bar, it can achieve a flow rate of up to 2 l/min. via the push-pull piston pump.
- A practical plug on the underside of the tank allows complete draining of residual liquids.
- This sprayer uses a 60 cm stainless steel spray lance and has a pressure gauge on the sturdy quick-release handle, which allows the pressure to be matched to any application.
- Supplied with a high-quality double flat-jet nozzle, with stainless steel nozzle screens. The efficiency and versatility of this engine powered high pressure sprayer is enhanced with the use of correct attachments.

POWERED by HONDA

Modell Part no.	433 43303
Engine	HONDA 4-stroke GX 25
Capacity cm ³	25
Nominal capacity I	20
Nozzle	Stainless steel double nozzle
Spray pressure bar	1.0 – 30
Output I/min with standard nozzle	1.0 l at 5 bar 1.4 l at 10 bar 1.9 l at 20 bar 2.3 l at 30 bar
Dry weight kg	9.8
Standard accessories	Stainless steel spray pipe, pressure gauge, padded carrying strap

Accessories

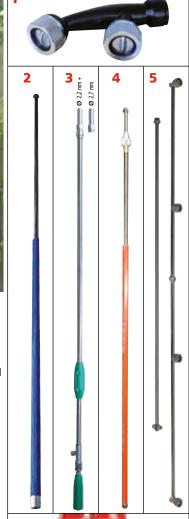



- 1 Twin nozzle, stainless steel
- 2 Extension wand, 120 cm, stainless steel
- 3 Spray wand, 120 cm with shut-off tap and stainless steel changeover nozzle
- 4 Telescopic extension wand, 120 - 230 cm, stainless steel
- 5 Spray boom with 4 nozzles, stainless
- 6 Extension hose 10 m with retaining bracket