


Central Article Code: D05139W32-B

Created: 11/01/2013

Local Code:

Modified: 20/12/2018

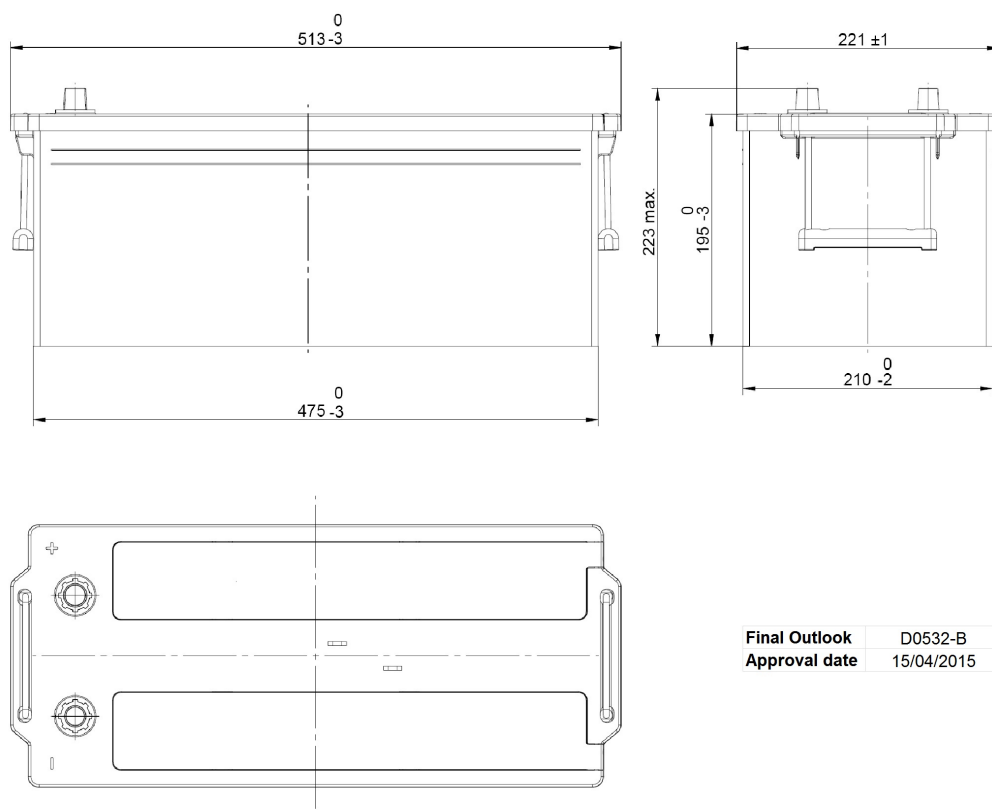

Final Outlook D0532-B
Approval date 15/04/2015

PERFORMANCES

| | | |
|---------------|----------------|------|
| Voltage (V): | 12 V | |
| C20 (Ah): | 172.0 | 20 h |
| Cranking (A): | 1390 | EN |
| Charge: | WET | |
| Technology: | Vented/Flooded | |
| Grid: | Hybrid | |

STD. DIMENSIONS

| | |
|------------------|-----|
| Length (mm ± 2): | 513 |
| Width (mm ± 2): | 223 |
| Height (mm ± 2): | 223 |

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.

CONTAINER

| | | |
|---------------|-----|-------|
| Type: | D05 | BLACK |
| Hold Down: | B0 | |
| H.D. Adapter: | No | |

COVER

| | | |
|-------------------|-------------------|-------|
| Type: | Flat/Press | BLACK |
| Polarity: | ETN 3 | |
| Terminals: | EN taper post | |
| Terminal Adapter: | No | |
| SOCI: | No | |
| Ventilation: | Central | |
| Filter: | 1 Filter per Vent | |
| Lateral Plug: | No | |

PLUGS

| | | |
|-------|--------------|-------|
| Type: | 2 x VCL Vent | BLACK |
|-------|--------------|-------|

HANDLES

| | | |
|-------|-----------------------|-------|
| Type: | 2 x Rope (Rigid holde | BLACK |
|-------|-----------------------|-------|

OTHERS

| | |
|-----------------|----|
| Degassing Tube: | No |
|-----------------|----|